



TECHNICAL DATA

Edge 100x30x15 conn.


Edges

Product description and Technical Specification

Edge with joint for the delimitation of safety flooring areas, playgrounds or other areas for specific activities, made of SBR rubber granules (Styrene Butadiene Rubber) assembled in a cold process with coloured polyurethane resins; length 1150 mm, height 300 mm, thickness 150 mm. Spacing between the two pin-holes is 1000 mm, with a diameter of 20 mm.



- Protection upon impact
- Easy installation and maintenance, non-toxic
- High durability in time

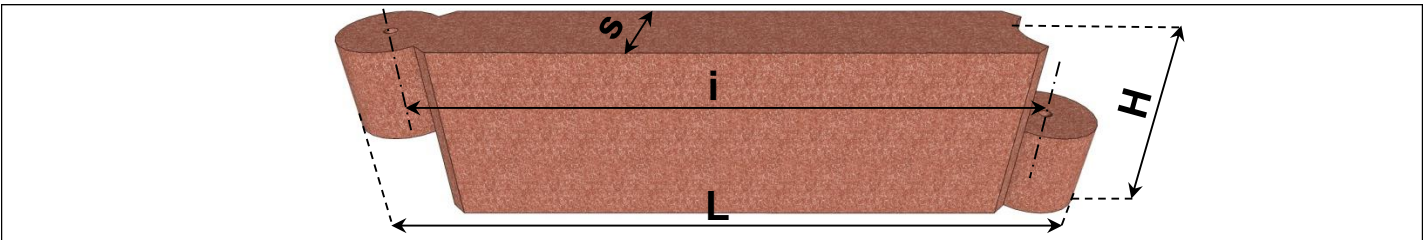

PHYSICAL CHARACTERISTICS	Norm	Unit	Bordo 100x30x15	Tolerance
Thickness		mm	150	± 1,5%
Length		mm	1150	± 1,5%
Height (H)		mm	300	± 1,5%
Spacing of pin-holes (i)		mm	1000	± 1,5%
Weight per piece		kg	34	± 5%
Colour	<i>(colour tone can have variations among different units)</i>		red - green - grey	

PHYSICAL AND CHEMICAL PROPERTIES	Norm	Unit	Bordo 100x30x15	
Fire resistance	EN 13501-1		Efl, E	
Temperature tolerance			- 40° C ; + 80° C	

PACKING AND STORING

Each pallet is wrapped and protected with waterproof polythene film. Inside storage is recommended to avoid possible water penetration.

WARNINGS

Make sure all the pieces have the same temperature during the entire installation period. Lay down the edges 24 hours before the installation to allow them to get their original dimensions.

Install all the pads in a single laying session in order to guarantee installation under similar conditions.

INFLUENCE FROM ATMOSPHERIC CONDITIONS

In order to get the idea application environmental conditions the temperature of the application site/place have to be above 4°C for at least 24 hours before the pads application. If the site application has temperature below to 4°C, please keep the pads stored for at least 72 hours before the installation at a temperature above 10°C.

Do not install the pads on sites where the temperature is below at 4°C for long time. The pads have to be stored and installed on shadow in order to avoid pads overheating.

The suggestions and technical information given above represent our knowledge regarding the properties and the product's uses. ISOLGOMMA reserve the right to modify or update this data without prior notice. This document is the property of ISOLGOMMA and all rights are therefore reserved