



TECHNICAL DATA

Megasport Grid

Sport and multipurpose floorings

Technical specification


Grid tiles for driveways, made of SBR rubber granules compacted with a polyurethane binder, with a rectangular shape of 100 cm length and 50 cm width, thickness 45 mm, equipped with connections for tiles interlocking.



- impacts protection on the floor
- easy application, low maintenance, non-toxic
- high durability

PHYSICAL CHARACTERISTICS	Unit	Grid	Tolerance
Thickness	mm	45	± 5%
Length	mm	1000	± 1,5%
Width	mm	500	± 1,5%
Superficial weight	kg	10.6	± 5%
Colour	-	green	± 5%

TECHNICAL CHARACTERISTICS	Unit	Grid	Tolerance
Critical Fall Height (HIC)	m	1.6	-

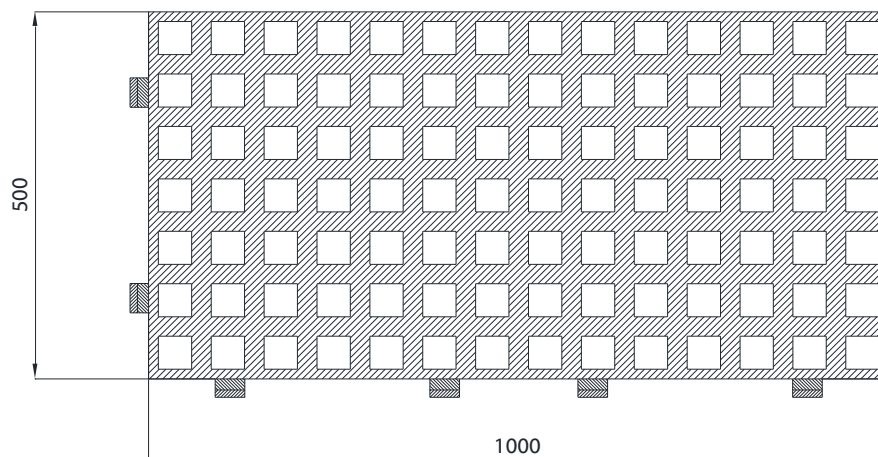

PHYSICAL AND CHEMICAL CHARACTERISTICS	Standard	Grid	Tolerance
Fire reaction	EN 13501-1	F	
Range of temperature	-	- 40° C ; + 80° C	

PACKING AND STORING

Each pallet is wrapped and protected with a waterproof polythene film. Inside storage is recommended, safe from rain and direct sunlight exposure.

The suggestions and technical information given above represent our knowledge regarding the properties and the product's uses. ISOLGOMMA reserve the right to modify or update this data without prior notice. This document is the property of ISOLGOMMA and all rights are therefore reserved.